

RECEIVED

MAR 18 2024

Submit In Quadruplicate To:

MONTANA BOARD OF OIL AND GAS CONSERVATION  
2535 ST. JOHNS AVENUE  
BILLINGS, MONTANA 59102

MONTANA BOARD OF OIL &  
GAS CONSERVATION • BILLINGS

SUNDRY NOTICES AND REPORT OF WELLS

Operator <b>Kraken Operating, LLC</b>		Lease Name: <b>Meldahl 14-29H</b>
Address <b>9805 Katy Freeway, Ste. 300</b>		Type (Private/State/Federal/Tribal/Allotted): <b>Private</b>
City <b>Houston</b> State <b>TX</b> Zip Code <b>77024</b>	Well Number: <b>14-29H</b>	
Telephone <b>(713) 360-7705</b> Fax	Unit Agreement Name: <b>NA</b>	
Location of well (1/4-1/4 section and footage measurements): <b>SWSW Sec. 29-T26N-R59E, 510' FSL 11401033' FWL</b>		Field Name or Wildcat: <b>Wildcat</b>
API Number: <b>25   083   22608</b>		Township, Range, and Section: <b>Sec 29-T26N-R59E</b>
State <b>TX</b> County <b>083</b> Well <b>22608</b>	Well Type (oil, gas, injection, other): <b>Oil</b>	County: <b>Richland</b>

Indicate below with an X the nature of this notice, report, or other data:

Notice of Intention to Change Plans	<input type="checkbox"/>	Subsequent Report of Mechanical Integrity Test	<input type="checkbox"/>
Notice of Intention to Run Mechanical Integrity Test	<input type="checkbox"/>	Subsequent Report of Stimulation or Treatment	<input type="checkbox"/>
Notice of Intention to Stimulate or to Chemically Treat	<input type="checkbox"/>	Subsequent Report of Perforation or Cementing	<input type="checkbox"/>
Notice of Intention to Perforate or to Cement	<input type="checkbox"/>	Subsequent Report of Well Abandonment	<input type="checkbox"/>
Notice of Intention to Abandon Well	<input type="checkbox"/>	Subsequent Report of Pulled or Altered Casing	<input type="checkbox"/>
Notice of Intention to Pull or Alter Casing	<input type="checkbox"/>	Subsequent Report of Drilling Waste Disposal	<input type="checkbox"/>
Notice of Intention to Change Well Status	<input type="checkbox"/>	Subsequent Report of Production Waste Disposal	<input type="checkbox"/>
Supplemental Well History	<input type="checkbox"/>	Subsequent Report of Change in Well Status	<input type="checkbox"/>
Other (specify) <u>Refrac</u>	<input checked="" type="checkbox"/>	Subsequent Report of Gas Analysis (ARM 36.22.1222)	<input type="checkbox"/>


**Describe Proposed or Completed Operations:**  
Describe planned or completed work in detail. Attach maps, well-bore configuration diagrams, analyses, or other information as necessary. Indicate the intended starting date for proposed operations or the completion date for completed operations.

**Kraken Operating would like to notify the state of our plans to refrac the subject well and requests approval to complete the work outlined in the attached documents.**  
**Please see attached for additional information.**

**SEE ATTACHED  
CONDITIONS OF  
APPROVAL**

**BOARD USE ONLY**

Approved MAR 22 2024  
Date

  
Name

Admin/Reg. Engineer  
Title

The undersigned hereby certifies that the information contained on this application is true and correct:

3-14-24 Date  
 Signed (Agent)

**Ray Noah - Regulatory Manager**  
Print Name and Title

Telephone: 713-360-7705


RECEIVED

**SUPPLEMENTAL INFORMATION**

MAR 18 2024

NOTE: Additional information or attachments may be required by Rule or by special request.  
Plot the location of the well or site that is the subject of this notice or report.

MONTANA BOARD OF OIL &  
GAS CONSERVATION • BILLINGS

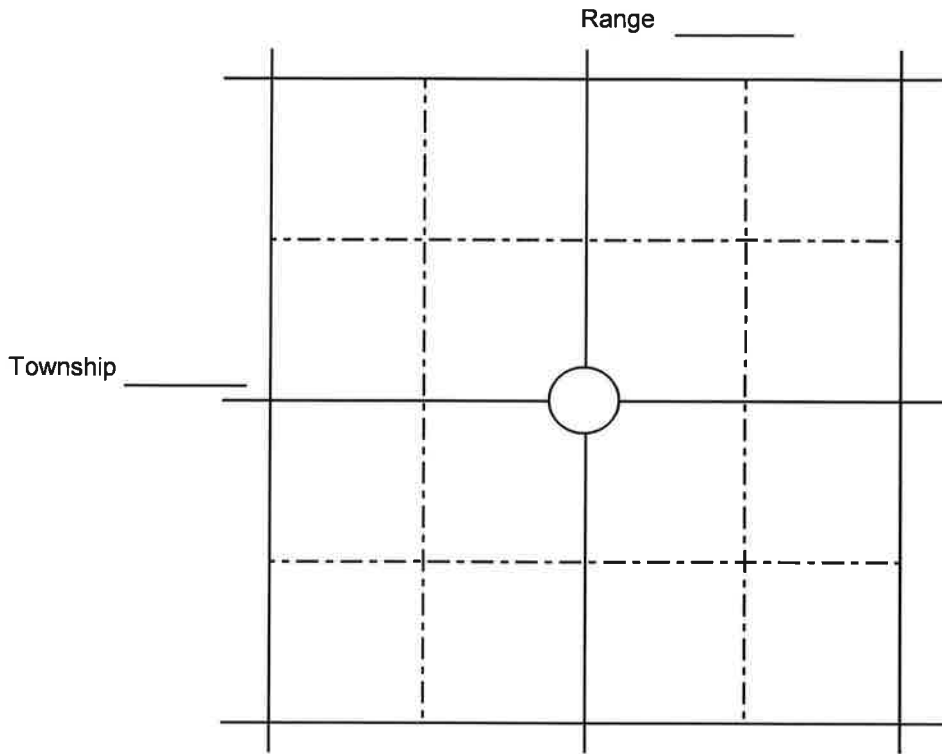

**BOARD USE ONLY**

**CONDITIONS OF APPROVAL**

The operator must comply with the following condition(s) of approval:

Failure to comply with the conditions of approval may void this permit.

08322608

RECEIVED

MAR 18 2024

MONTANA BOARD OF OIL & GAS CONSERVATION • BILLINGS

Kraken Operating, LLC Proposed Well Stimulation

Total Clean Fluid – 235,000 bbls

Maximum Anticipated Treating Pressure – 9,800 psi

Hydraulic Fracturing Fluid Components Information Disclosure:

Trade Name	Supplier	Purpose	Ingredients	Chemical Abstract Service Number (CAS #)	Maximum Ingredient Concentration in Additive (% by mass)**	Mass per Component (LBS)	Maximum Ingredient Concentration in HF Fluid (% by mass)**
Water	Operator	Carrier	Carrier	7732-18-5	100.00%	82,315,800.00	84.06572%
SurfFlo 430	Innospec	Flowback Additive	MSDS and Non-MSDS Ingredients Listed Below			7,435.80	0.00759%
FRP-1S	Liberty Oilfield Services	Friction reduction	MSDS and Non-MSDS Ingredients Listed Below			252,853.79	0.25823%
DVA-75	Liberty Oilfield Services	Diverting Agent	MSDS and Non-MSDS Ingredients Listed Below			469.00	0.00048%
BioClear 5000	Lubrizol	Biocide	MSDS and Non-MSDS Ingredients Listed Below			8,387.32	0.00857%
ScaleCease 7103	Innospec	Scale Inhibitor	MSDS and Non-MSDS Ingredients Listed Below			15,850.17	0.01619%
HCL-15	Liberty Oilfield Services	Solvent	MSDS and Non-MSDS Ingredients Listed Below			17,295.26	0.01766%
ACI-300	WST	Corrosion Inhibitor	MSDS and Non-MSDS Ingredients Listed Below			67.43	0.00007%
WA-100	WST	Wetting Agent	MSDS and Non-MSDS Ingredients Listed Below			34.79	0.00004%
IC-50S	WST	Iron Control	MSDS and Non-MSDS Ingredients Listed Below			125.74	0.00013%
Liberty Clean Out	Liberty Oilfield Services	Cleanup Solution	MSDS and Non-MSDS Ingredients Listed Below			74.86	0.00008%
Crystalline Silica	Liberty Oilfield Services	Sand	MSDS and Non-MSDS Ingredients Listed Below			15,300,000.00	15.62526%
The trade name(s) of the additive(s) used, supplier(s), and the purpose(s) of the additive(s) for the above additive(s) are listed below.							
	Liberty Oilfield Services	Sand	Crystalline Silica (quartz)	14808-60-7	99.90%	15,284,700.00	15.60963%
	Liberty Oilfield Services	Sand	Aluminum Oxide	1344-28-1	1.00%	153,000.00	0.15625%
	Liberty Oilfield Services	Friction reduction	Petroleum distillates, hydro treated light	64742-47-8	45.00%	113,784.20	0.11620%
	Liberty Oilfield Services	Sand	Iron Oxide	1309-37-1	0.10%	15,300.00	0.01563%
	Liberty Oilfield Services	Sand	Titanium Oxide	13463-67-7	0.10%	15,300.00	0.01563%
	Innospec	Scale Inhibitor	Water	7732-18-5	95.00%	15,057.66	0.01538%
	Liberty Oilfield Services	Solvent	Water	7732-18-5	85.00%	14,700.97	0.01501%
	Liberty Oilfield Services	Friction reduction	Poly(oxy-1,2-ethanediyl), a-tridecyl-w-hydroxy-, branched	69011-36-5	3.00%	7,585.61	0.00775%
	Innospec	Flowback Additive	Water	7732-18-5	95.00%	7,064.01	0.00721%
	Liberty Oilfield Services	Solvent	Hydrochloric Acid	7647-01-0	15.00%	2,594.29	0.00265%
	Lubrizol	Biocide	2,2-dibromo-3-nitropropionamide	10222-01-2	10.00%	838.73	0.00086%
	Innospec	Scale Inhibitor	BHMT Phosphonate	Proprietary	5.00%	792.51	0.00081%
	Innospec	Scale Inhibitor	Proprietary Ingredient	Proprietary	5.00%	792.51	0.00081%
	Innospec	Flowback Additive	Benzenesulfonic Acid, dodecyl-, cmpd, with 2-aminoethanol	26836-07-7	10.00%	743.58	0.00076%
	Innospec	Flowback Additive	Dodecylbenzene sulfonate, triethanolamine salt	27323-41-7	10.00%	743.58	0.00076%
	Liberty Oilfield Services	Diverting Agent	Poly(lactide Resin	9051-89-2	100.00%	469.00	0.00048%
	Innospec	Flowback Additive	Sodium Alpha Olefin Sulfonate	68439-57-6	5.00%	371.79	0.00038%
	WST	Iron Control	2-hydroxypropane-1,2,3-tricarboxylic acid	77-92-9	60.00%	75.45	0.00008%
	Liberty Oilfield Services	Cleanup Solution	Oxygenate and paraffinic stream	876065-86-0	99.00%	74.11	0.00008%
	WST	Wetting Agent	Ethoxylated Decyl Alcohol	78330-20-8	40.00%	13.92	0.00001%
	WST	Corrosion Inhibitor	2-Propyn-1-ol compound with methyloxirane	38172-91-7	15.00%	10.11	0.00001%
	Liberty Oilfield Services	Cleanup Solution	C.I. Solvent Yellow 33	8003-22-3	1.00%	0.75	0.00000%
	Innospec	Flowback Additive	Triethanolamine	103-71-6	0.01%	0.67	0.00000%
	Innospec	Flowback Additive	Ethanolamine	141-43-5	0.01%	0.67	0.00000%

08322608

## MONTANA BOARD OF OIL AND GAS ATTACHMENT TO FORM 2 “CONDITIONS OF APPROVAL”

A. Field Inspector must be notified at least **24 hours** in advance of the start of fracture stimulation operation.

### **B. 36.22.1106 SAFETY AND WELL CONTROL REQUIREMENTS – HYDRAULIC FRACTURING**

(1) New and existing wells which will be stimulated by hydraulic fracturing must demonstrate suitable and safe mechanical configuration for the stimulation treatment proposed.

(2) Prior to initiation of fracture stimulation, the operator must evaluate the well. If the operator proposes hydraulic fracturing through production casing or through intermediate casing, **the casing must be tested to the maximum anticipated treating pressure**. If the casing fails the pressure test it must be repaired or the operator must use a temporary casing string (fracturing string).

(a) **If the operator proposes hydraulic fracturing through a fracturing string, it must be stung into a liner or run on a packer set not less than 100 feet below the cement top of the production or intermediate casing and must be tested to not less than maximum anticipated treating pressure minus the annulus pressure applied between the fracturing string and the production or immediate casing.**

(3) A casing pressure test will be considered successful if the pressure applied has been held for 30 minutes with no more than ten percent pressure loss.

(4) A **pressure relief valve(s)** must be installed on the treating lines between pumps and wellhead to limit the line pressure to the test pressure determined above; the well **must be equipped with a remotely controlled shut-in device** unless waived by the board administrator should the factual situation warrant.

(5) **The surface casing valve must remain open** while hydraulic fracturing operations are in progress; the annular space between the fracturing string and the intermediate or production casing must be monitored and may be pressurized to a pressure not to exceed the pressure rating of the lowest rated component that would be exposed to pressure should the fracturing string fail.

History: 82-11-111, MCA; IMP, 82-11-111, MCA; NEW, 2011 MAR p. 1686, Eff. 8/26/11.

### **C. 36.22.1010 WORK-OVER, RECOMPLETION, WELL STIMULATION – NOTICE AND APPROVAL**

(1) Within 30 days following completion of the well work, a subsequent report of the actual work performed must be submitted on Form No. 2.